
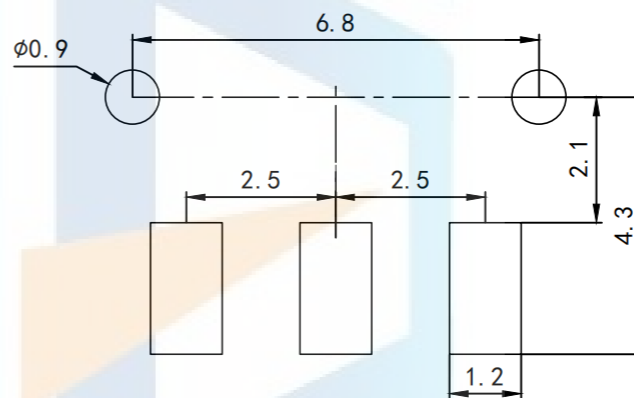
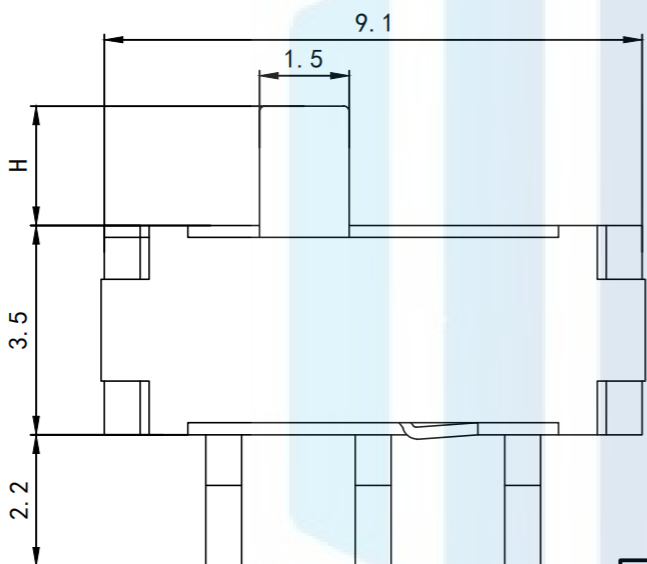

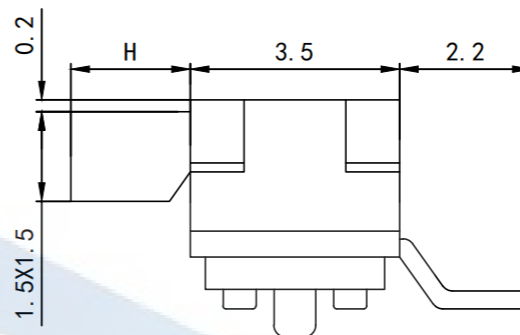


RoHS2.0
Compliant

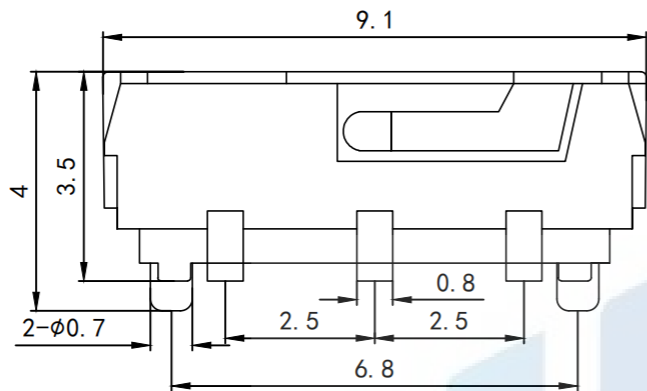


item

1. Rated electrical load: DC12V 0.1A
2. Insulation resistance: $\geq 100M\Omega$
3. Compressive strength: AC250V (50Hz) 1min
4. Ambient temperature: $-25^{\circ}C \sim +70^{\circ}C$
5. Relative temperature: ($40^{\circ}C$) $\leq 90\%$
6. Contact resistance: $\leq 50M\Omega$
7. Operation force: $200gf \pm 30gf$
8. Temperature resistance: 250°
9. Life: 10000 times

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

迷你小拨动开关
卧式单边3脚贴片带柱

PART NO: MSK-22D14A

DRAWING NO: 9.1*3.5*3.5*H带柱

DRAWN:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

18-10-08

18-10-08

18-10-08

UNIT:
mm

SCALE:
FULL

SIZE:
A4