









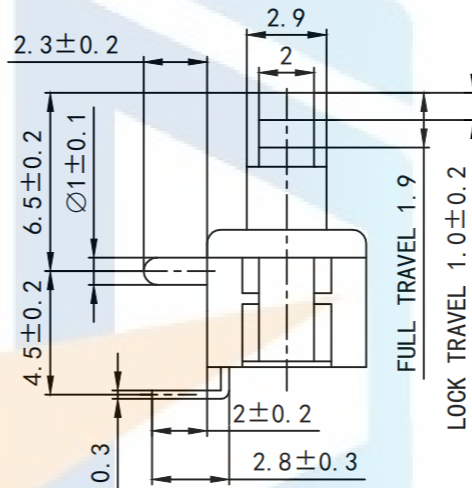


RoHS2.0  
Compliant

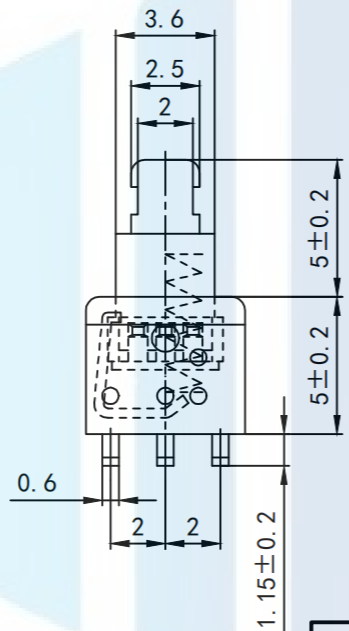

P. C. B LAYOUT



**ELECTRICAL CHARACTERISTICS**

1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S


**MECHANICAL CHARACTERISTICS**

1. PRACTICAL TEMPERATURE RANG: -40°C~+85°C
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles

**TOLERANCE**

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

**PROTECTON**



东莞市恒祺电子科技有限公司  
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

**TITLE:**

按键开关  
自(无)锁

PART NO:5.8\*5.8卧插3脚带定位

DRAWING NO:5.8\*5.8\*11

DRAWN:

CHECKED:

APPROVED:

DATE: 18-10-08

DATE: 18-10-08

DATE: 18-10-08

UNIT:  
mm

SCALE:  
FULL

SIZE:  
A4