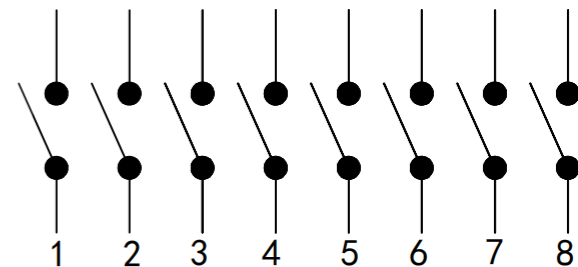
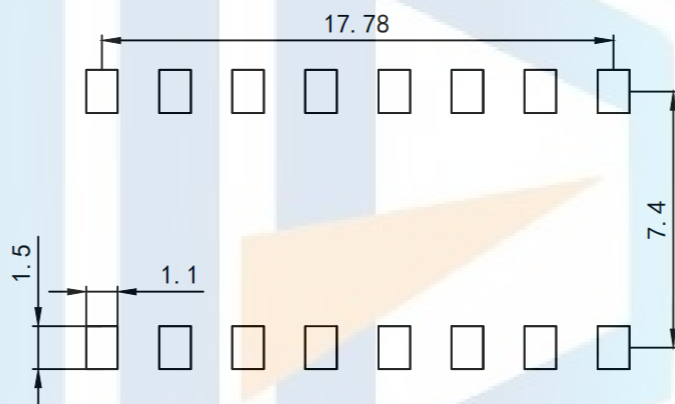
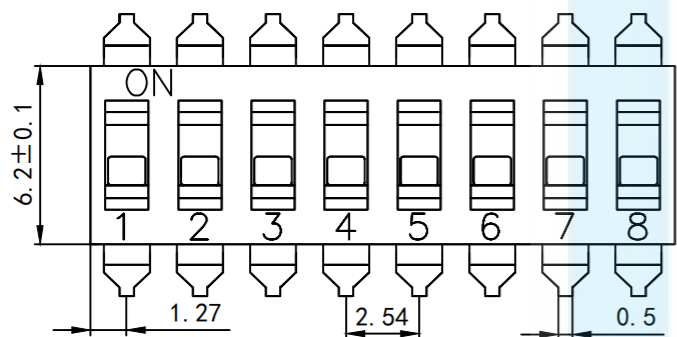
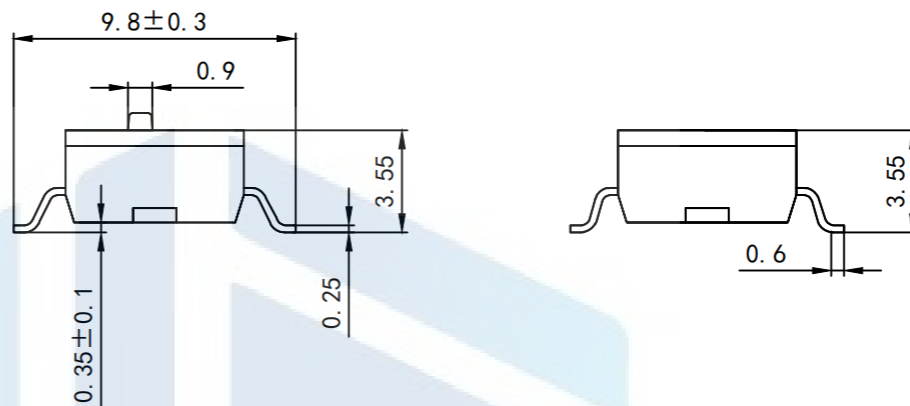
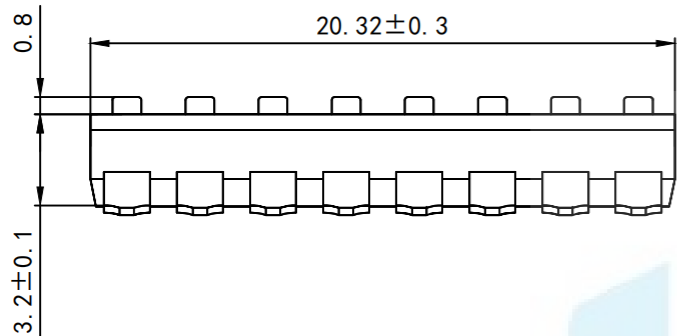




RoHS2.0  
Compliant



**Specification:**  
 Electrical life: 2000 times  
 rated current:  
     No Switching: 100mA@50VDC  
     Switching: 25mA@24VDC  
 Insulation Resistance: 100MΩ@250VDC  
 Contact Resistance: 50mΩmax  
 Dielectric strength: 500VAC/1min  
 Operating force: 500gfmax  
 Operating temperature: -30°C to 85°C (no ice)

<b>TOLERANCE</b> X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		<b>东莞市恒祺电子科技有限公司</b> Dongguan Hengqi Electronic Technology Co., Ltd	
		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone: 15812872448	
<b>PROTECTON</b> 	<b>DRAWN:</b>	<b>DATE:</b> 18-10-08	<b>UNIT:</b> mm
	<b>CHECKED:</b>	<b>DATE:</b> 18-10-08	<b>SCALE:</b> FULL
	<b>APPROVED:</b>	<b>DATE:</b> 18-10-08	<b>SIZE:</b> A4

**TITLE:** 拨码开关      **PART NO:** BIS008  
**DRAWING NO:** 20.32\*3.2\*2.54