

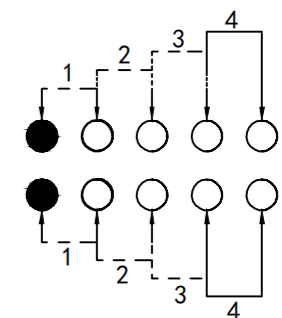
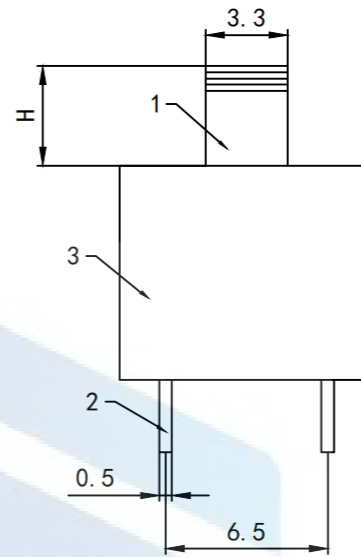
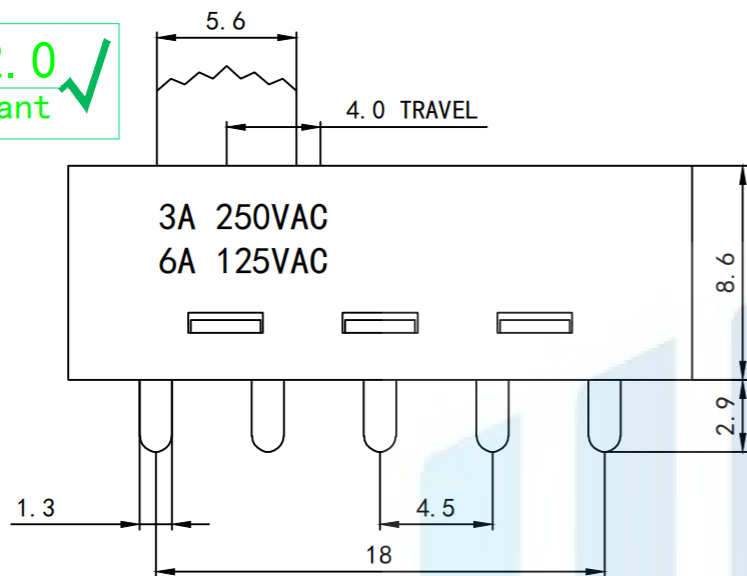




RoHS2.0
Compliant

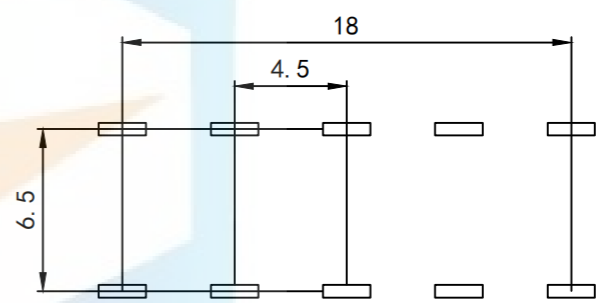

SCHEMATIC

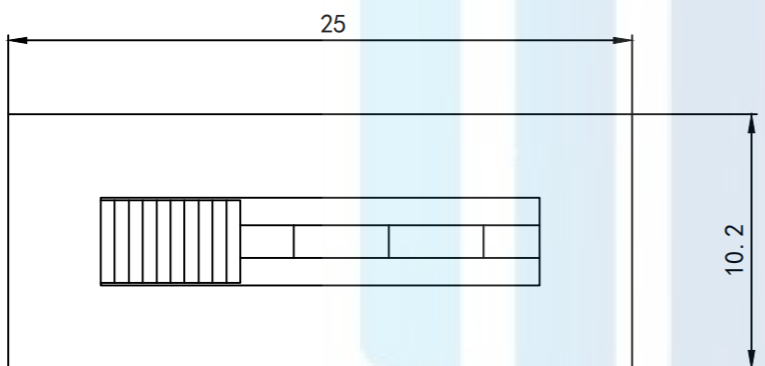

- Electrical performance parameters:
1. Rated load: AC125 3A
 2. Contact resistance: less than 100 milliohm
 3. Insulation resistance: more than 100 megohm
 4. Withstand voltage: AC 500V
 5. Strength: 350 ± 100 gf
 6. Life: 5000 times
 7. Wave soldering: 255 ± 5 degrees

TOLERANCE X. XXX ± 0.05 X. XX ± 0.15 X. X ± 0.20 X. ± 0.30 ANGLE $\pm 5.0^\circ$		 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
		https://www.hq-dz.com phone: 15812872448	
PROTECTON 		TITLE: 拨动开关	
DRAWN:		PART NO: SS-24H30	
CHECKED:		DRAWING NO: 25*10.2*H	
APPROVED:		DATE: 18-10-08	UNIT: mm
		DATE: 18-10-08	SCALE: FULL
		DATE: 18-10-08	SIZE: A4