

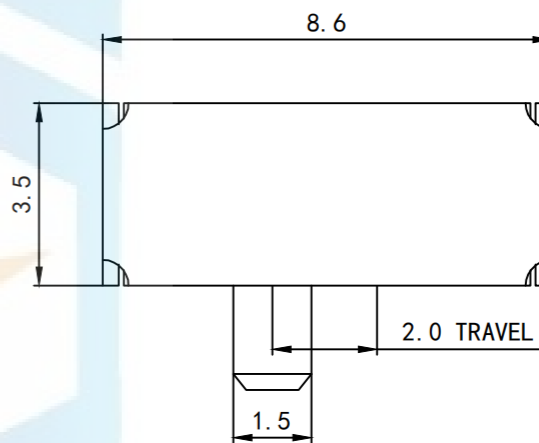
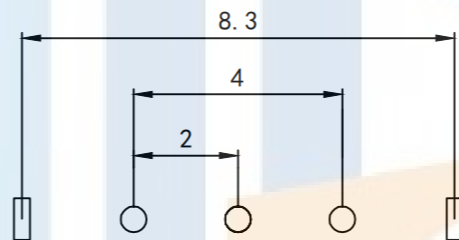
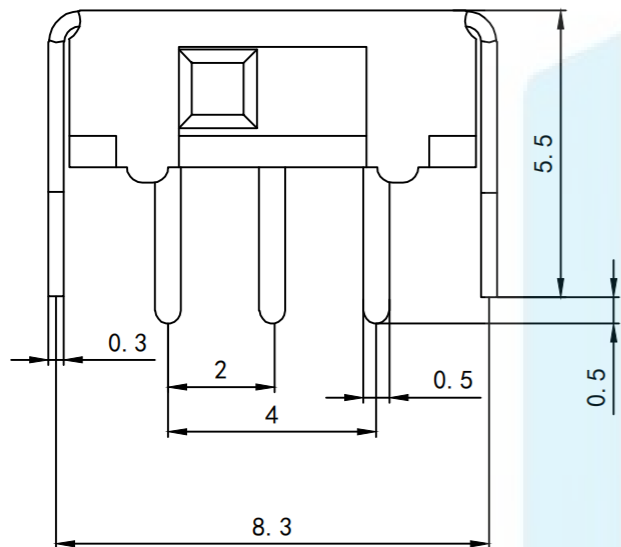
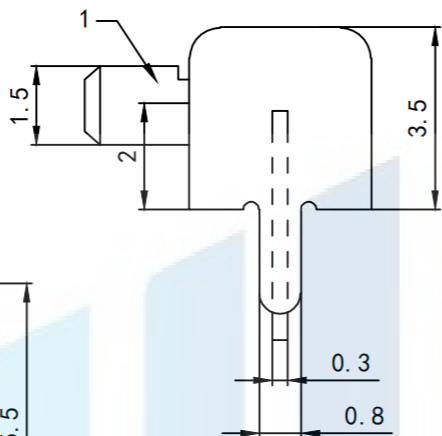



RoHS2.0
Compliant

4-code chip



1. Rated load: DC50V 0.3A
2. Contact resistance: less than 100 milliohm
3. Insulation resistance: more than 100 megohm
4. Withstand voltage: AC 500V
5. Strength: 250 ± 100 gf
6. Life: 10000 times
7. Hand welding: 35 ± 10 degrees

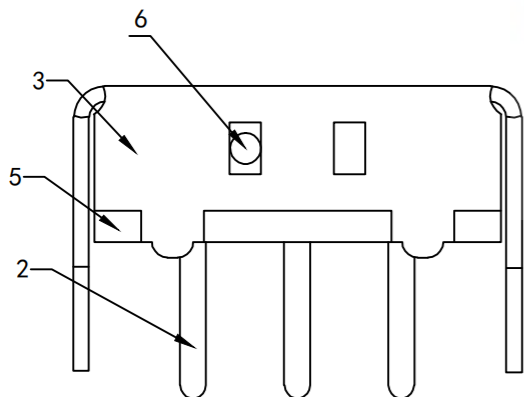

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^\circ$



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>


phone: 15812872448

TITLE:
拨动开关

PART NO: SK-12D29

DRAWING NO: 8.6*3.5*H

PROTECTON



DRAWN:

CHECKED:

APPROVED:

DATE: 18-10-08

DATE: 18-10-08

DATE: 18-10-08

UNIT: mm

SCALE: FULL

SIZE: A4