
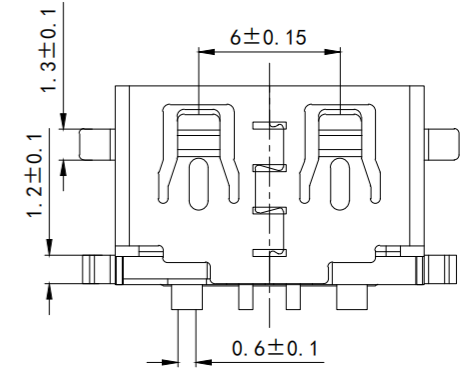


RoHS2.0
Compliant

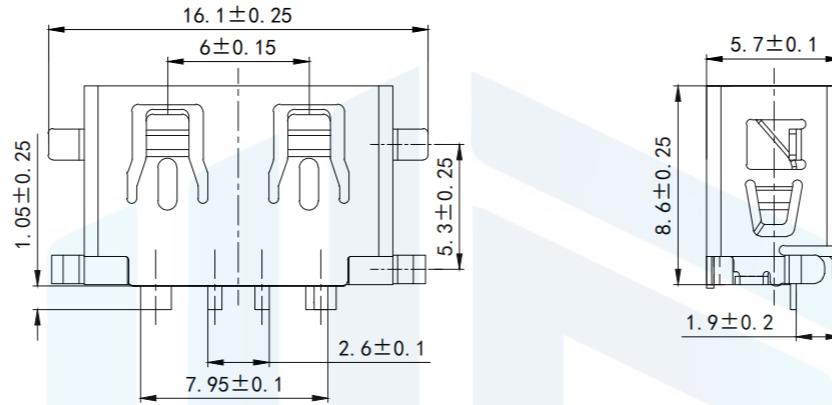

Features:

One, ELECTRICAL

1. Rated current :2.0A
2. Contact impedance :30 MILLIOHMS MAX
3. Withstand voltage :500V AC/1 A MAX
4. Insulation impedance :100V DC/100 MEGA OHMS MIN

Second, mechanical properties:

1. Insertion force :35N MAX
2. Output :10N MIN

iii. MATERIAL



1. Plastic :LCP black
2. Terminal :C2680 T=0.23MM
3. Shell :SPCC T=0.30MM



Four :FINISH

1. Terminal: Contact point gold-plated G/F
PIN pin welding area is plated with bright tin 100U"MIN.
2. Shell: nickel-plated 80U"MIN(salt spray 24H)
- 5, electroplating products need to do the tin sticking test: the tin sticking area is more than 95%.
6. Working temperature : -55° C~+85° C

Seven salt spray test:

Through 24H salt spray test at a concentration of 5 1% salt water, no rust phenomenon

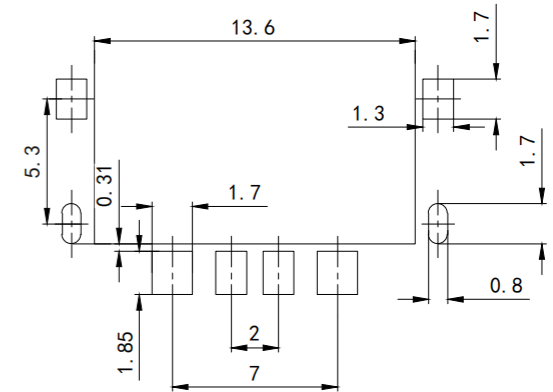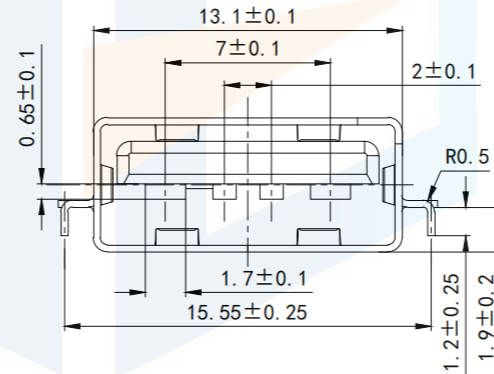

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		https://www.hq-dz.com phone:15812872448	
PROTECTON 	X. X	±0.20	TITLE: USB A/F沉板1.9前贴后插 大电流L=8.6		PART NO:USB2.0-B086
	X.	±0.30	DRAWING NO:13.1*8.6*5.7		DATE: 18-10-08 UNIT: mm
	ANGLE	±5.0°	DRAWN:	DATE: 18-10-08	SCALE: FULL
			APPROVED:	DATE: 18-10-08	SIZE: A4