


RoHS2.0
Compliant

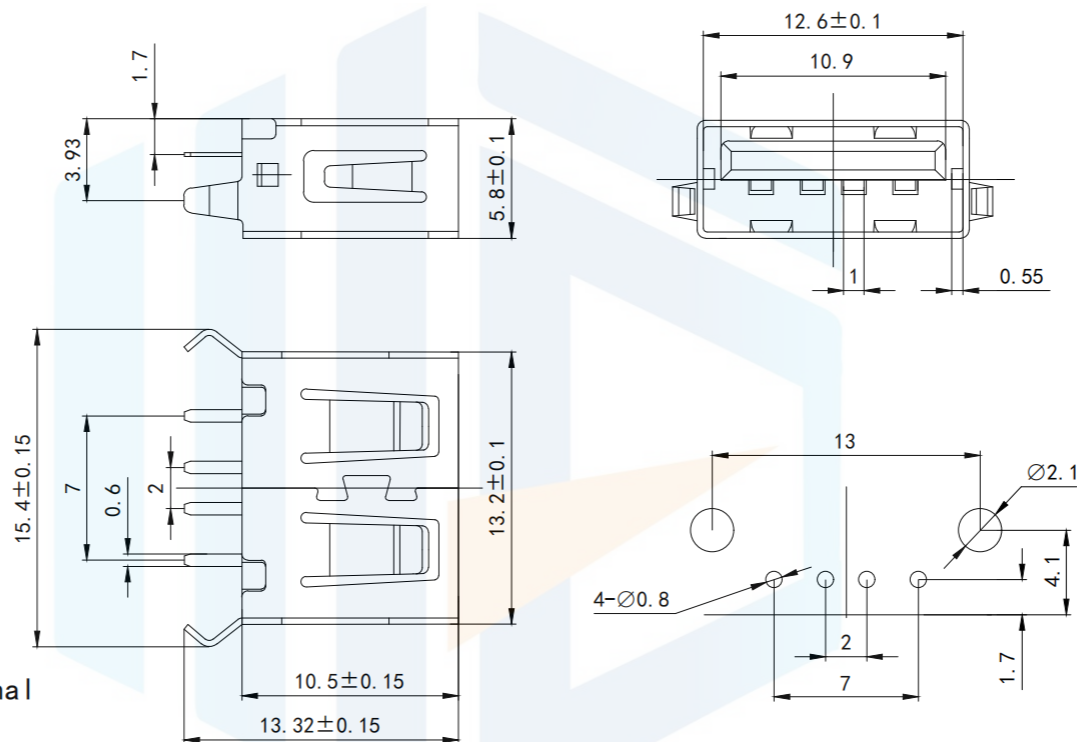

Specifications:

Electrical:

1. Current Rating:1.5A contact terminal
2. Voltage Rating:30V DC
3. Contact Resistance:30 milliohms MAX
4. Dielectnic Withstanding Voltage:500 V AC AT Sea Level
5. Insulation Resistance:1000MEGA ohms MIN

Mechanical:

1. Connector Mate and Unmate Force: 3.75kgf (MAX) Unmate force:1.02kgf (MIN)
2. Terminal Retention: 1.2kgf (MIN)

Material:

1. Housing: High Temperature Thermoplastics, U1 94V-0 PBT/LCP White/Black
 2. Contact: Copper Alloy C2680
 3. Shell: Copper Alloy C2680/SPCC
- Finish:**
1. Contact: Plated Gold in Mating Area; Tin On Solder Tails
 2. Shell: Nickel Plating

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
		https://www.hq-dz.com phone:15812872448	
PROTECTON 	TITLE: USB A/F 短体10.5弯脚直边		PART NO: USB2.0-A105
	DRAWN:		DRAWING NO: 13.2*10.5*5.8
	CHECKED:	DATE: 18-10-08	UNIT: mm
APPROVED:	DATE: 18-10-08	SCALE: FULL	SIZE: A4