

RoHS2.0
Compliant

Specifications:

Electrical:





1. Current Rating
3.0A/contact termina
2. Voltage Rating
30V DC
3. Contact RESISTANCE
30 milliohms MAX
4. Dielectnic Withstanding Voltage:
500 V AC AT Sea Level
5. Lnsulation Resistance:
1000MEGA ohms MIN

Mechanical:

1. Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. Terminal Retenion
1.0kgf (MIN)

Matorial:


1. Housing:
Hing Temperature Tnermaplastics,
 2. Contact:Copper Alloy C2680
 3. Shel: SPCG
- Finish:
1. Contact: Plated Gold in Mating Area
Tin On Solder Talls
- 50U(MIN) nickel is plated around the terminal, half gold tin 1U
2. Burning :Shell: 80U "(MIN) nickel is plated around the shell
- Nickel Plating

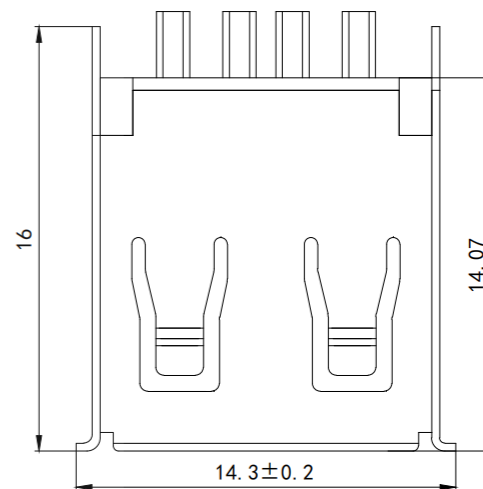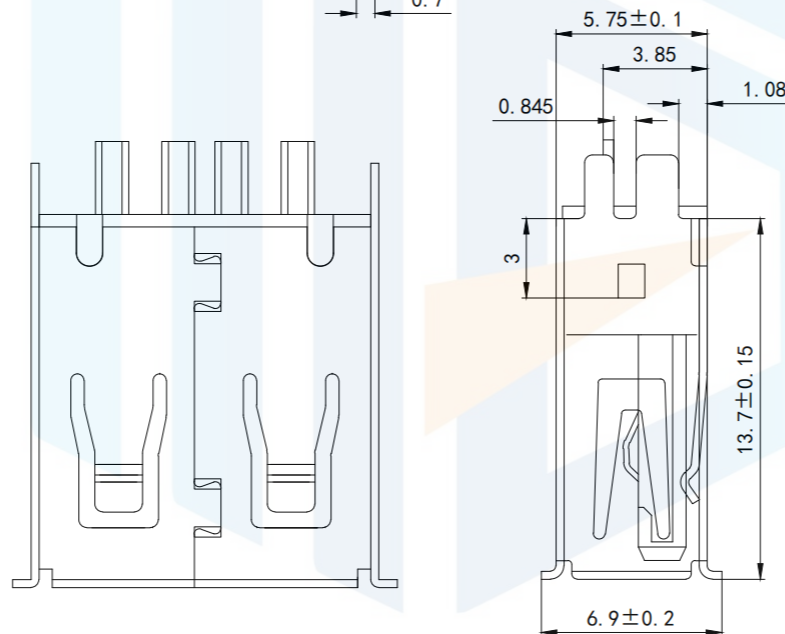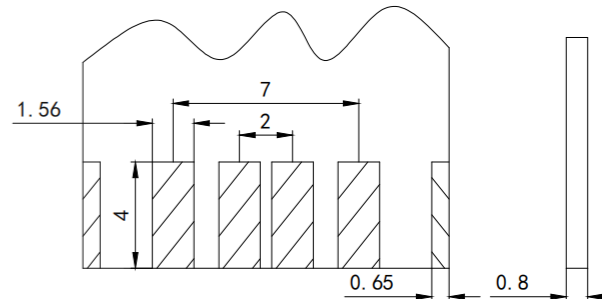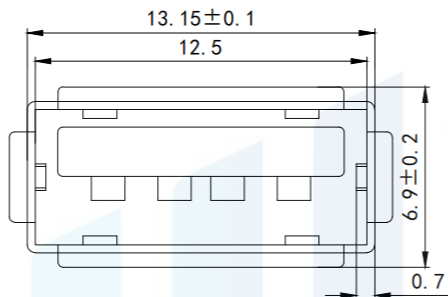

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

USB A/F 夹板0.8卷边L=13.7

PART NO:USB2.0-A080

DRAWING NO:14.3*13.7*6.9

DRAWN:

DATE: 18-10-08

UNIT:
mm

CHECKED:

DATE: 18-10-08

SCALE:
FULL

APPROVED:

DATE: 18-10-08

SIZE:
A4