
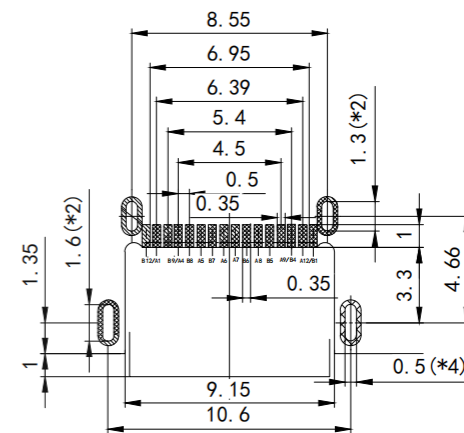
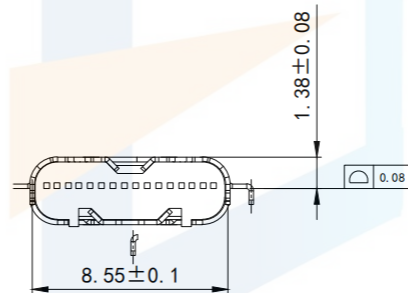
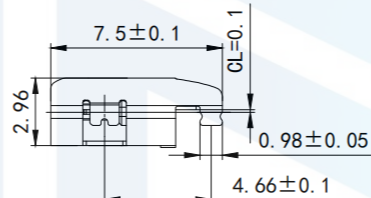

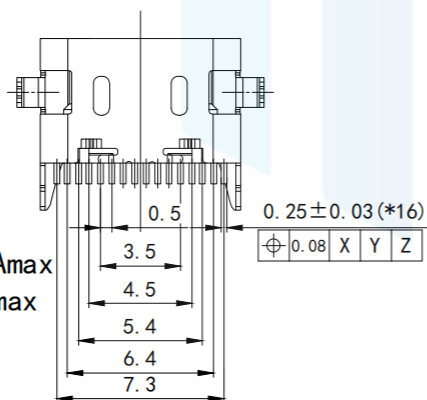



RoHS2.0
Compliant

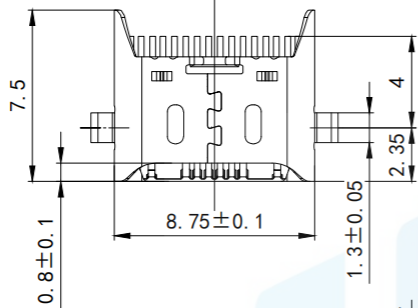

RECOMMENDED PCB LAYOUT
General Tolerance ±0.05mm

Remark:

1. Specifications

1.1 Rated current:

Pin A1A12 and B1 B12 total 8A max

Pin A4A9 and B4B9 total 8A max

Other Pin 0.25A max

1.2 Rated voltage: 30V AC

1.3 Contact Resistance:

Initial value 40mΩ max

50mΩ maximum after endurance

1.4 Withstand voltage: 100V AC for 1 minute

1.5 Insulation resistance: 100MΩ min. 1 min

1.6 Mechanical Properties:

Pull-out force >= 8N (1000 cycles)

6N (10,000 times) <= 20N

1.7 Durability: 10000 times


1.8 Operating temperature:

-40° C ~ 85° C 1.9 Salt spray: 48H

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

TYPE C 16PIN沉板两脚插板单边U口
A20S

PART NO: TYPE-C16P-CBA20

DRAWING NO: 10.6*7.5*2.96

DRAWN:

CHECKED:

APPROVED:

DATE: 18-10-08

DATE: 18-10-08

DATE: 18-10-08

UNIT:
mm

SCALE:
FULL

SIZE:
A4