
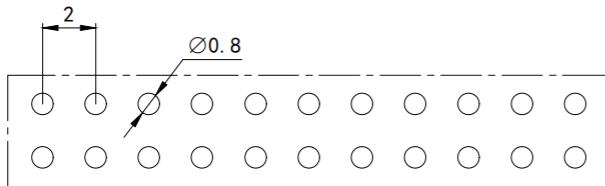

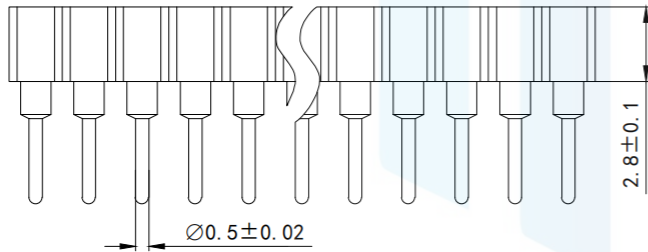


RoHS2.0
Compliant

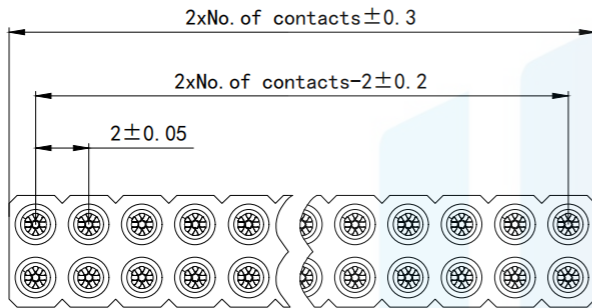

Recommended P.C.B
Layout (± 0.05)

Technical Data

Pin(outer sleeve): Brass, machined CuZn38Pb2
 Clp(Contact 6 Finger): Beryllium copper, heat treated
 Insulator: PPS UL94V-0 colour: black
 Current rating: 1Amps
 Mating pin \varnothing : 0.40/0.66mm
 Forces: (polished steel gauge \varnothing 0.46mm)
 -Insertion: 0.7N typ
 -Withdrawal: 0.4N typ
 Mechanical life: min 500cycles
 Contact resistance: max 10m Ω
 Dielectric strength: min 1000V RMS
 Operating temperature: -40° C to +105° C
 Soldering temperature: +255° C

TOLERANCE			东莞市恒祺电子科技有限公司		
X. XXX	± 0.05		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	± 0.15	https://www.hq-dz.com		phone: 15812872448	
X. X	± 0.20	TITLE: 排母(圆针)		PART NO: FH-2.0-D2XX	
X.	± 0.30			DRAWING NO: 7.4*2.0*针位	
ANGLE	$\pm 5.0^\circ$	APPROVED:		DATE: 18-10-08	
PROTECTON 		DRAWN:		UNIT: mm	
		CHECKED:		SCALE: FULL	
		APPROVED:		SIZE: A4	