




RoHS2.0
Compliant

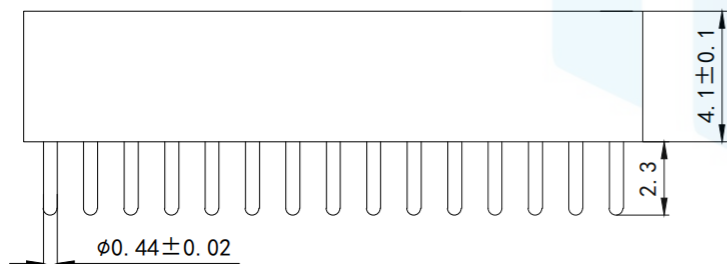

Technical Data

Pin(outer sleeve) :Brass,machined
 CuZn38Pb20 (Contact 6 Finger) :Beryllium copper, heat teated
 Insulator:PPS UL94V-0 colour:black
 Current rating:1Amps Mating pin p:0.305/0.483mm
 Forces:(polished steel gauge p0.38mm)-Insertion:0.5N typ-
 Withdrawal:0.2N typ Mechanical life:min 500cycles
 Contact resistance:max 10m Dielectric strength:min 1000V
 RMS Operaling temperature:-40° C to +105° C
 Soldering temperature:+255° C

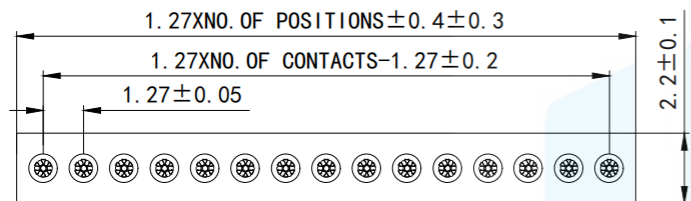

TOLERANCE			东莞市恒祺电子科技有限公司		
X. XXX	±0.05		Dongguan Hengqi Electronic Technology Co., Ltd		
X. XX	±0.15	https://www.hq-dz.com		phone:15812872448	
X. X	±0.20	TITLE: 排母 (圆针单排)		PART NO: FH-1.27-D1XX	
X.	±0.30			DRAWING NO: 6.4*1.27*针位	
ANGLE	±5.0°	DRAWN: _____ CHECKED: _____ APPROVED: _____		DATE: 18-10-08	
				DATE: 18-10-08	UNIT: mm
				DATE: 18-10-08	SCALE: FULL
		DATE: 18-10-08		SIZE: A4	