

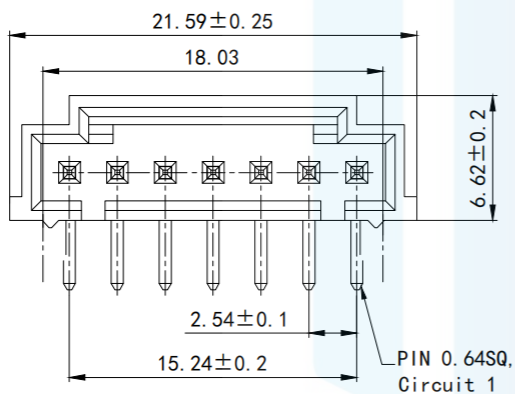
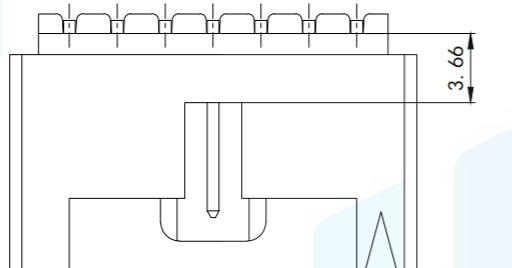


RoHS2.0  
Compliant





**SPECIFICATION**

Current Rating: 3.0 Amp  
 Insulator Resistance: 1000MΩ min.  
 Contact Resistance: 20 Milliohms Max  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C~+105°C  
 Contact Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PA-6T  
 The production accord with RoHS requirement



Recommended P.C.  
Layout (±0.05)

<b>TOLERANCE</b> X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		<b>东莞市恒祺电子科技有限公司</b> Dongguan Hengqi Electronic Technology Co., Ltd	
		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone: 15812872448	
<b>PROTECTON</b> 	<b>DRAWN:</b>	<b>DATE:</b> 18-10-08	<b>UNIT:</b> mm
	<b>CHECKED:</b>	<b>DATE:</b> 18-10-08	<b>SCALE:</b> FULL
	<b>APPROVED:</b>	<b>DATE:</b> 18-10-08	<b>SIZE:</b> A4
<b>TITLE:</b> 针座 (杜邦2.54)		<b>PART NO:</b> PH-2.54-R107	
		<b>DRAWING NO:</b> 13.59*21.59*6.62	