
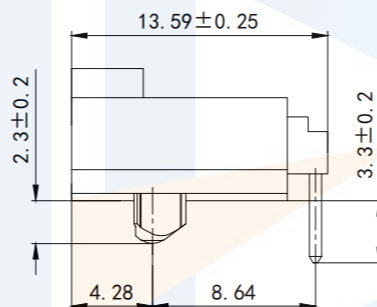
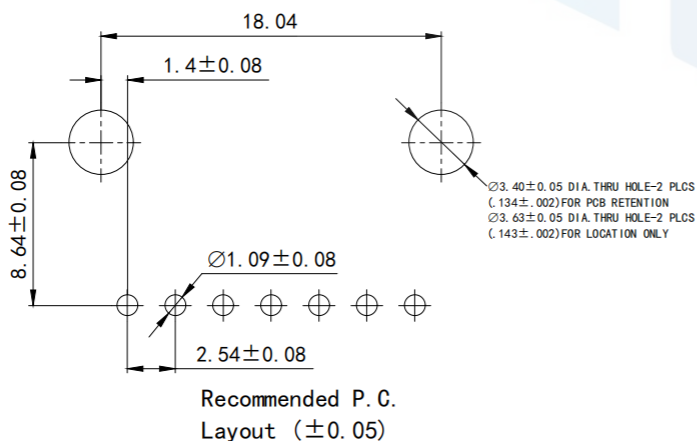
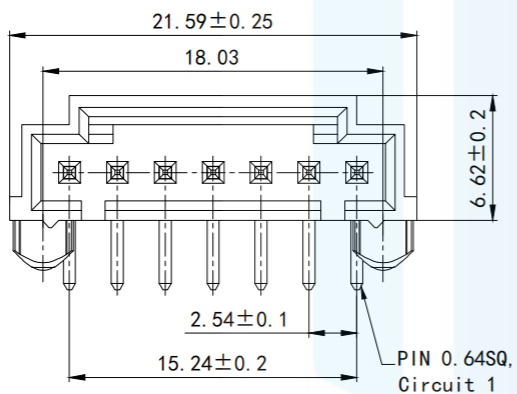


RoHS2.0  
Compliant

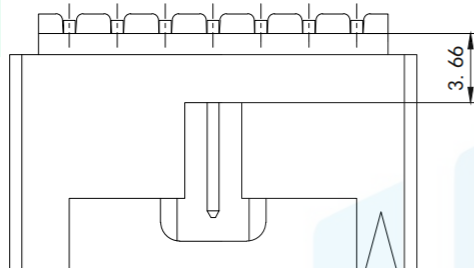


**SPECIFICATION**

Current Rating: 3.0 Amp  
 Insulator Resistance: 1000M $\Omega$  min.  
 Contact Resistance: 20 Milliohms Max  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C  
 Contact Materia: Brass  
 Insulator Materia: Polyester, UL 94V-0  
 Standard: PA-6T  
 The production accord with RoHS requirement

**TOLERANCE**

X. XXX	$\pm 0.05$
X. XX	$\pm 0.15$
X. X	$\pm 0.20$
X.	$\pm 0.30$
ANGLE	$\pm 5.0^{\circ}$

**PROTECTON**



东莞市恒祺电子科技有限公司  
 Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

**TITLE:**

针座 (杜邦2.54)

PART NO: PH-2.54-R107A

DRAWING NO: 13.59\*21.59\*6.62

DRAWN:

DATE:

18-10-08

UNIT:  
mm

CHECKED:

DATE:

18-10-08

SCALE:  
FULL

APPROVED:

DATE:

18-10-08

SIZE:  
A4