

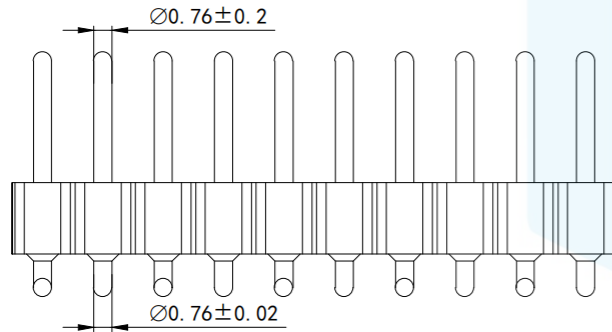
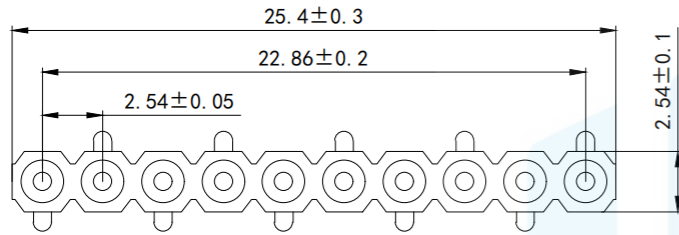


RoHS2.0
Compliant





Technical Data

Pin(outer sleeve): Brass, machined CuZn38Pb2
 Insulator: PPS UL94V-0 colour: black
 Current rating: 3Amps
 Mating pin ϕ : 0.76mm
 Contact resistance: max 10m Ω
 Dielectric strength: min 1000V RMS
 Operating temperature: -40° C to +105° C
 Soldering temperature: +255° C

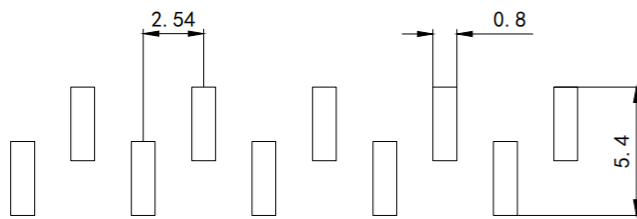

Recommended P. C. B
Layout (± 0.05)

TOLERANCE X. XXX ± 0.05 X. XX ± 0.15 X. X ± 0.20 X. ± 0.30 ANGLE $\pm 5.0^\circ$		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
		https://www.hq-dz.com phone: 15812872448	
PROTECTON 	TITLE: 排针(立贴圆针)		PART NO: PH-2.54-S10X
	DRAWN:		DRAWING NO: 1*2.54*25.4
	CHECKED:	DATE: 18-10-08	UNIT: mm
APPROVED:	DATE: 18-10-08	SCALE: FULL	
	DATE: 18-10-08	SIZE: A4	