

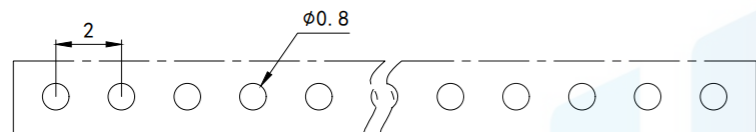
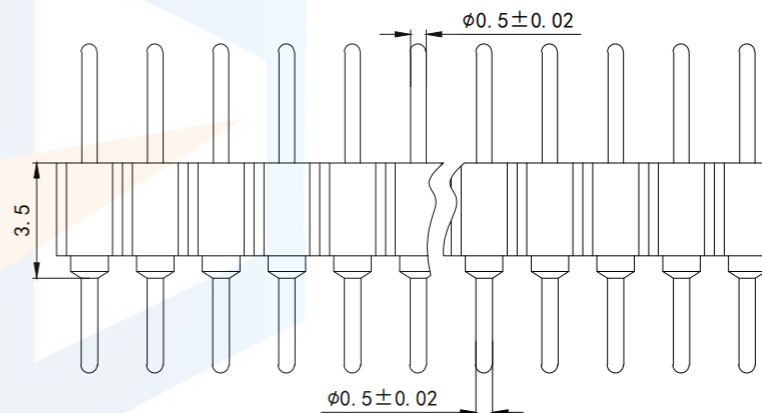


RoHS2.0  
Compliant

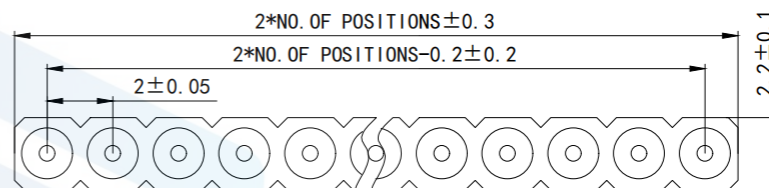

RECOMMENDED P. C. B  
LAYOUT ( $\pm 0.05$ )

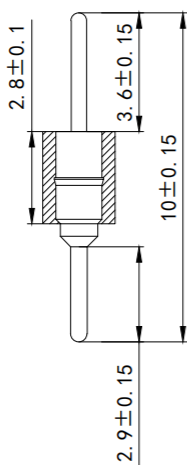

Technical Data

Pin (outer sleeve): Brass, machined  
CuZn38Pb2

Insulator: PPS UL94V-0 colour: black

Current rating: 2Amps

Mating pin pitch: 0.50mm

Contact resistance: max 10m

Dielectric strength: min 1000V RMS

to +105°C operating


temperature: -40°C +105°C

Soldering temperature: +255°C

TOLERANCE

X. XXX	$\pm 0.05$
X. XX	$\pm 0.15$
X. X	$\pm 0.20$
X.	$\pm 0.30$
ANGLE	$\pm 5.0^\circ$

PROTECTON



东莞市恒祺电子科技有限公司  
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

排针 (圆针)

PART NO: PH-2.0-D10XX

DRAWING NO: 10\*2.0\*针位

DRAWN:

DATE:

18-10-08

UNIT:  
mm

CHECKED:

DATE:

18-10-08

SCALE:  
FULL

APPROVED:

DATE:

18-10-08

SIZE:  
A4