

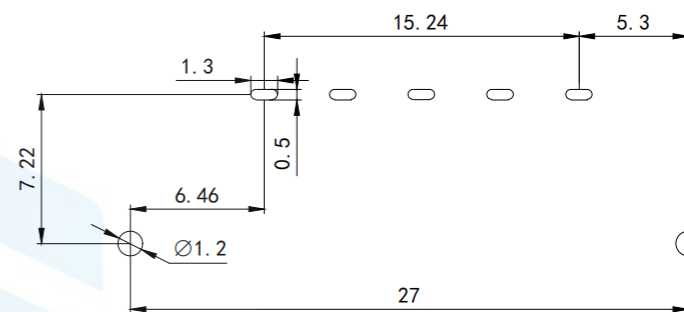
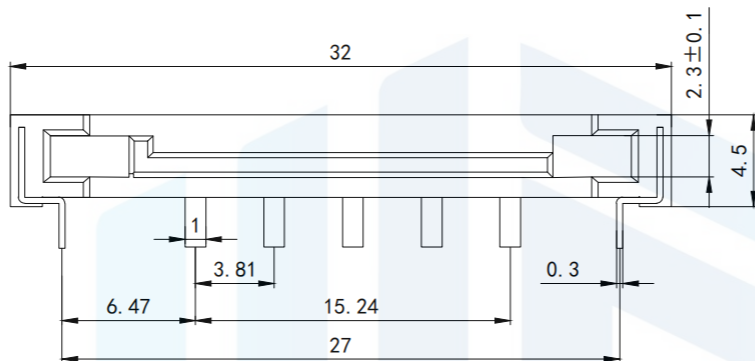


RoHS2.0  
Compliant

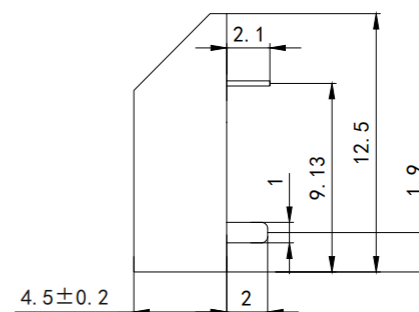

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05

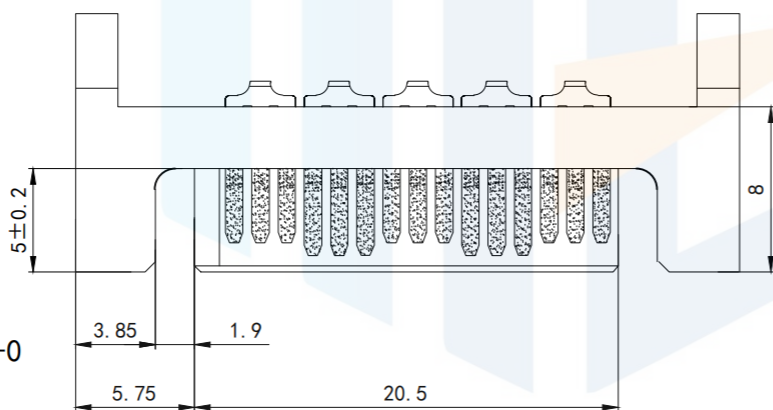

NOTES:

1. MATERIAL:

HOUSING: PA46/LCP30%G/FUL94V-0

COLOR: BLACK

CONTACT: BRASS T=0.30mm

2. FINISH:

CONTACT: GOLD FLASHPLATING ON CONTACT AREA

100u"MIN. TIN PLATING ON SOLDER TAILS

50u"MIN. NICKEL UNDERPLATING OVER ALL

BOARD LOCK: 100UMIN. TIN PLATING ON SOLDER TAILS

50U"MIN. NICKEL UNDERPLATING OVER ALL

3. ELECTRICAL:

CURRENT RATING: 15 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 mΩ MAX

INSULATION RESISTANCE: 1000 MΩ MIN


DIELECTRIC WITH STANDING VOLTAGE: 500DC

OPERATING TEMPERATURE: -40°C ~ +85°C

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

SATA15P带地片 90度 新款

PART NO: SAT-15P-108

DRAWING NO: 12.5\*32\*4.5

DRAWN:

DATE: 18-10-08

UNIT: mm

CHECKED:

DATE: 18-10-08

SCALE: FULL

APPROVED:

DATE: 18-10-08

SIZE: A4