

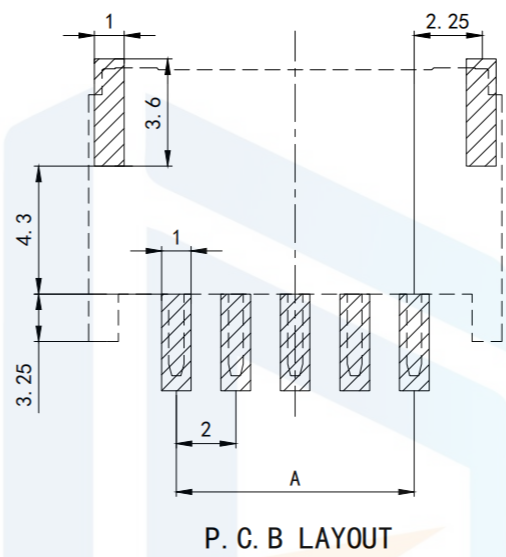
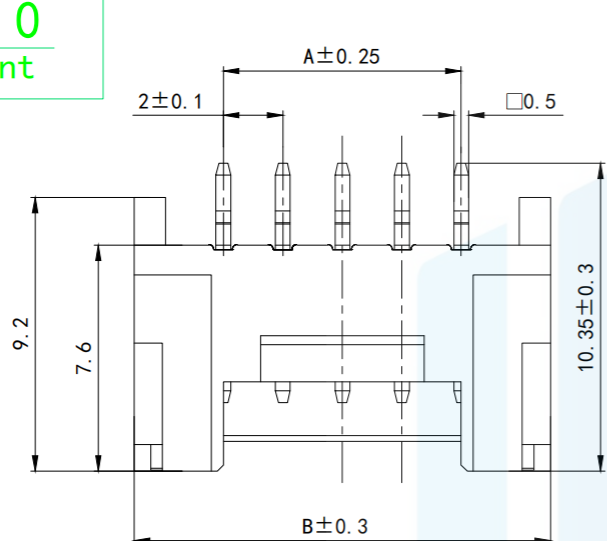



RoHS2.0  
Compliant

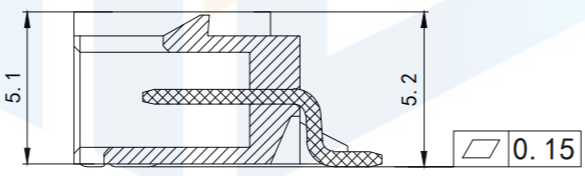



PIN数	尺寸 (mm)			
	A	B	C	D
2	2.0	8.0	4.9	2.8
3	4.0	10.0	6.9	3.0
4	6.0	12.0	8.9	3.5
5	8.0	14.0	10.9	5.5
6	10.0	16.0	12.9	7.5
7	12.0	18.0	14.9	9.5
8	14.0	20.0	16.9	11.5
9	16.0	22.0	18.9	13.5
10	18.0	24.0	20.9	15.5
11	20.0	26.0	22.9	17.5
12	22.0	28.0	24.9	19.5
13	24.0	30.0	26.9	21.5
14	26.0	32.0	28.9	23.5
15	28.0	34.0	30.9	25.5
16	30.0	36.0	32.9	27.5

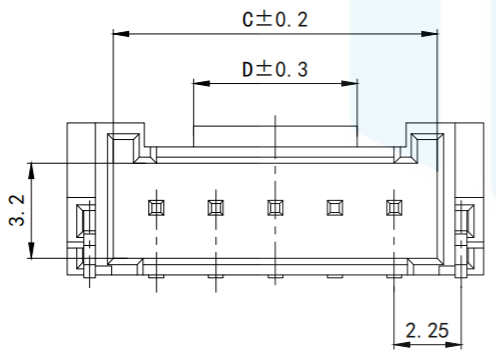

PHB-2AWT

Specifications:

1. Current rating: 2A
2. Voltage rating: 100V AC, DC
3. Insulation Resistance: 1000M Min.
4. Dielectric Withstanding: 800V AC 1Minne
5. Contact Resistance: 20m2 Max.
6. Operating Temperature: -25'C to +85C
7. Materials: Contact Material: Brass (Sn plating)
8. Soldering Terminal: Brass (Sn plating)
9. Insulation Material: LCP UL94V-0

<b>TOLERANCE</b> X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		<b>东莞市恒祺电子科技有限公司</b> Dongguan Hengqi Electronic Technology Co., Ltd	
		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone: 15812872448	
<b>PROTECTON</b> 	<b>TITLE:</b> 针座	<b>PART NO:</b> PHB-2.0卧贴-XX	
	<b>DRAWN:</b>	<b>DRAWING NO:</b> 2*2.0*针位	
	<b>CHECKED:</b>	<b>DATE:</b> 18-10-08	<b>UNIT:</b> mm
<b>APPROVED:</b>	<b>DATE:</b> 18-10-08	<b>SCALE:</b> FULL	
	<b>DATE:</b> 18-10-08	<b>SIZE:</b> A4	