





RoHS2.0
Compliant

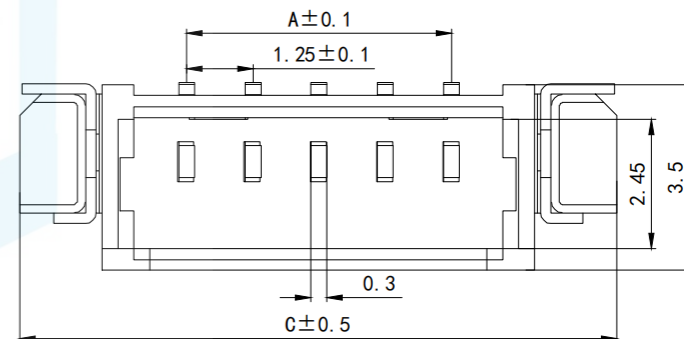

孔数	型号	尺寸 (mm)		
		A	B	C
2	1.25-2ALT	1.25	4.3	7
3	1.25-3ALT	2.5	5.55	8.25
4	1.25-4ALT	3.75	6.8	9.5
5	1.25-5ALT	5	8.05	11.3
...
16	1.25-16ALT	18.75	21.8	24.5

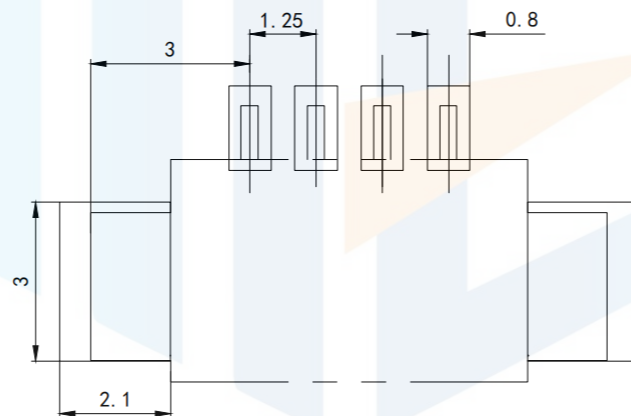

Specifications/ Technical Specifications

Current rating: 2A Current rating: 2A

Voltage rating: 125 V AC, DC

Rated voltage :126V AC, DC

Insulation Resistance: 1000MΩ Min.

Insulation resistance: minimum 1000MR

Dielectric Withstanding:

Withstand voltage :800VAC 1 min

800V AC1 Min

Contact Resistance

: Contact resistance: Max. 20mΩ Operating

Temperature:-25°C to +85°C

Operating temperature :-25°C to 85° C

20mΩ Max.

Materials/Material: Contact Material: Brass (Sn

plating) Materials/Material: Contact material:

brass (SN plating)

Soldering Terminal: Brass (Sn plating)

Solder material: Brass (tinned)


Insulation Material: LCP UL94V-0

Vitriol material, LCP UL94 V-0

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

针座

PART NO:MX-1.25卧贴-XX

DRAWING NO:2*1.25*针位

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4