

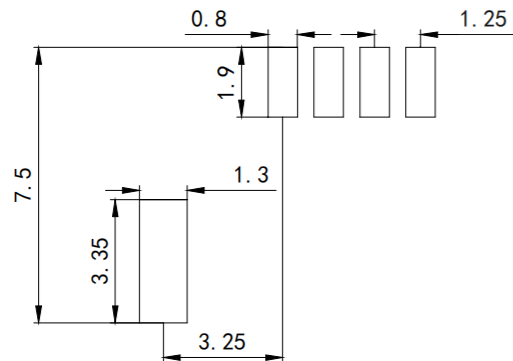
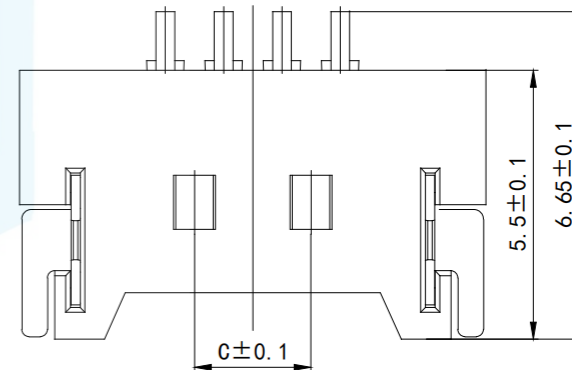



RoHS2.0
Compliant

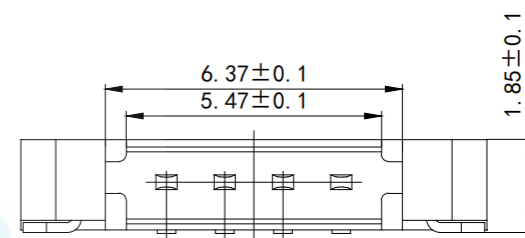

安装开孔尺寸

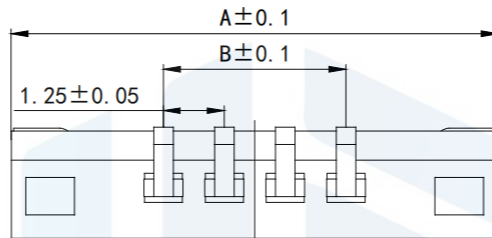


Technical requirement
Spacing of each plate: 1.25MM
Rated voltage :50V/250V AC DC
Rated current: 1.5A
Insulation resistance: 80MΩ
MIN
Contact resistance :20MΩ MAX
Operating temperature : -20° C+80° C
The general tolerance for linear dimensions is ±0.2

孔位	A	B	C	孔位	A	B	C
2	7.5	1.25	0	2	20	13.75	12.5
3	8.75	2.5	0	3	21.25	15	13.75
4	10	3.75	2.5	4	22.5	16.25	15
5	11.25	5	3.75	5	23.75	17.5	16.25
6	12.5	6.25	5	6	25	18.75	17.5
7	13.75	7.5	6.25	7	26.25	20	18.75
8	15	8.75	7.5	8	27.5	21.25	20
9	16.25	10	8.75	9	28.75	22.5	21.25
10	17.5	11.25	10	10	30	23.75	22.5
11	18.75	12.5	11.25				

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

针座

PART NO: JH-1.25卧贴超薄

DRAWING NO: 2*1.25*针位

DRAWN:

CHECKED:

APPROVED:

DATE:

18-10-08

UNIT: mm

DATE:

18-10-08

SCALE: FULL

DATE:

18-10-08

SIZE: A4