

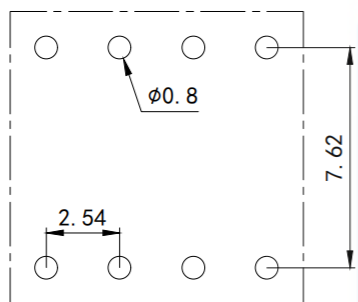
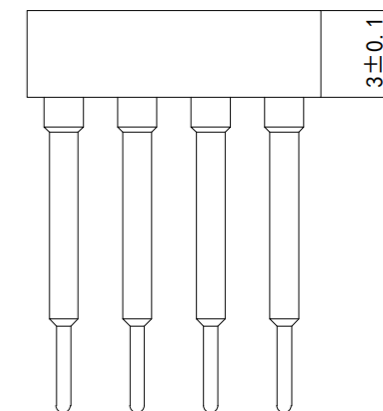


RoHS2.0
Compliant

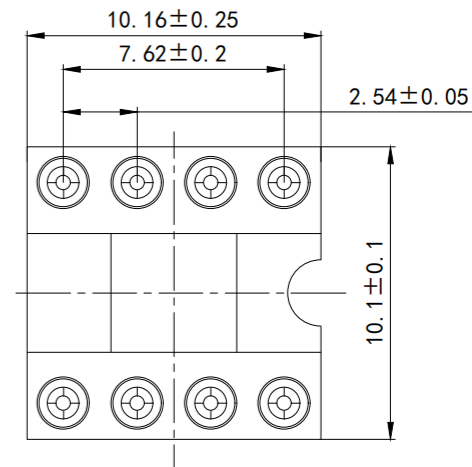

RECOMMENDED P. C. B
LAYOUT (± 0.05)

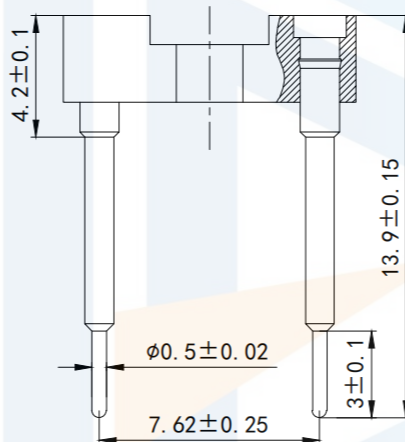

Technical Data

Pin(outer sleeve):Brass, machined CuZn38Pb2

Clip(Contact 4 Flinger):Beryllium copper, heat teated

Insulator:PBT UL94V-0 colour:black

Tin Plated:2um/80u"NI, 5um/200u"Sn

Gold Plated:2um"/80u"Ni, GF

Current rating:3AmpsContact resistance:max 10m


Dielectric strength:min 1000V RMS

to+105° Coperaling temperature:-40C+105° C

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^\circ$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

IC座圆针长针

PART NO: FH-2.54-208T

DRAWING NO: 2*2.5*针位

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4