

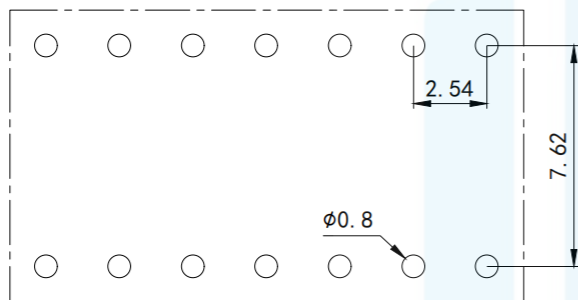
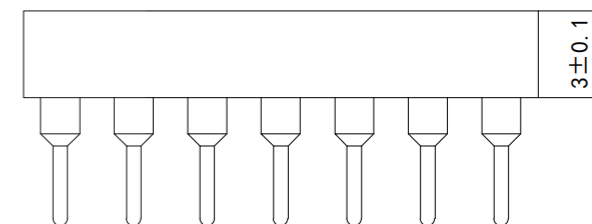


RoHS2.0  
Compliant

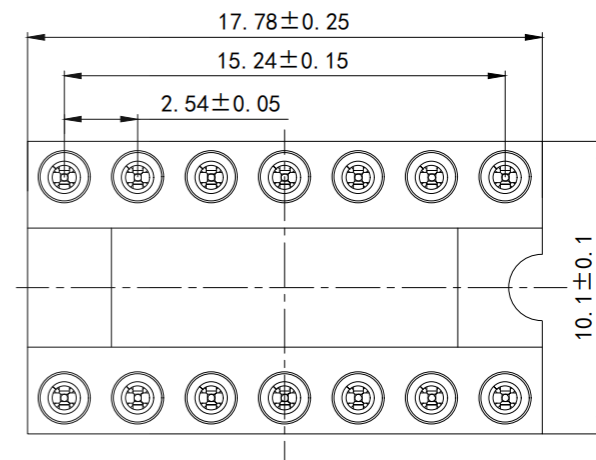

RECOMMENDED P. C. B  
LAYOUT ( $\pm 0.05$ )

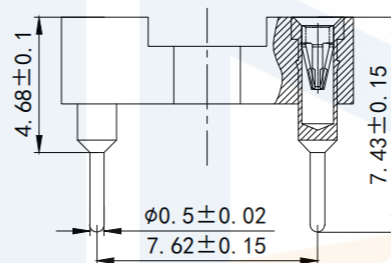

Technical Data

Pin(outer sleeve):Brass, machined CuZn38Pb2  
Clip(Contact 4 Flinger):Beryllium copper, heat teated

Insulator:PBT UL94V-0 colour:black

Tin Plated:2um/80u"Ni, 5um/200u"Sn

Gold Plated:2um"/80u"Ni, GF

Current rating:3AmpsContact resistance:max 10m


Dielectric strength:min 1000V RMS

to+105° Coperaling temperature:-40C+105° C

TOLERANCE

X. XXX	$\pm 0.05$
X. XX	$\pm 0.15$
X. X	$\pm 0.20$
X.	$\pm 0.30$
ANGLE	$\pm 5.0^\circ$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:  
IC座 (圆针)

PART NO: FH-2.54-0743

DRAWING NO: 2\*2.54\*P位

DRAWN:

DATE: 18-10-08

UNIT:  
mm

CHECKED:

DATE: 18-10-08

SCALE:  
FULL

APPROVED:

DATE: 18-10-08

SIZE:  
A4