
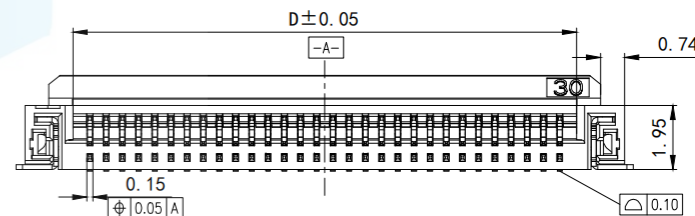
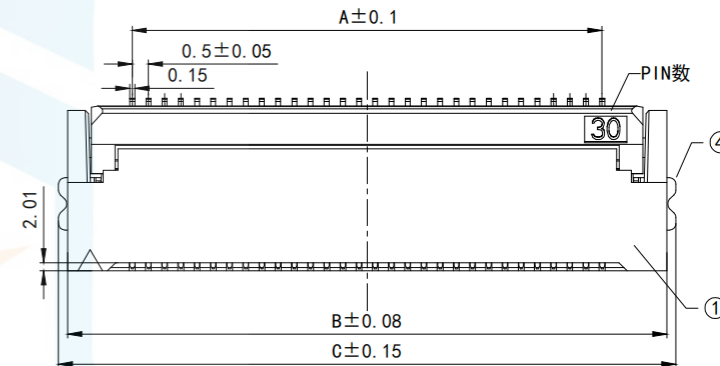
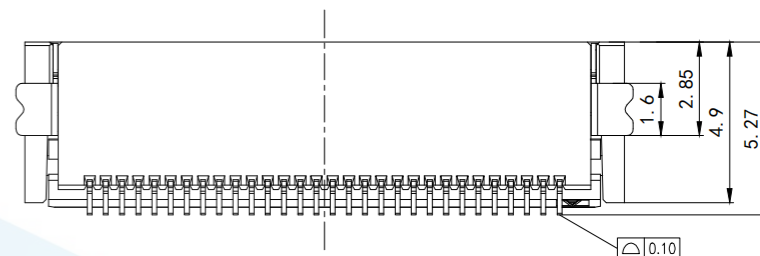

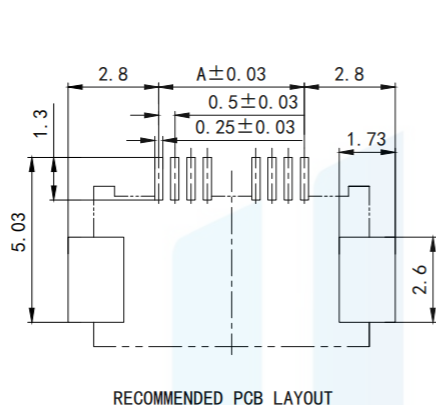


RoHS2.0  
Compliant

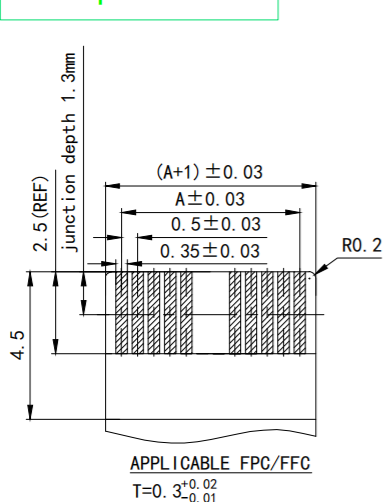

Circuit	Dimensions (mm)				Circuit	Dimensions (mm)			
	A	B	C	D		A	B	C	D
4	1.5	5.5	6.05	2.55	25	12	16	16.55	13.05
5	2	6	6.55	3.05	26	12.5	16.5	17.05	13.55
6	2.5	6.5	7.05	3.55	28	13.5	17.5	18.05	14.55
8	3.5	7.5	8.05	4.55	30	14.5	18.5	19.05	15.55
9	4	8	8.55	5.05	32	15.5	19.5	20.05	16.55
10	4.5	8.5	9.05	5.55	34	16.5	20.5	21.05	17.55
12	5.5	9.5	10.05	6.55	36	17.5	21.5	22.05	18.55
13	6	10	10.55	7.05	40	19.5	23.5	24.05	20.55
14	6.5	10.5	12.05	7.55	45	22	26	26.55	23.05
15	7	11	11.55	8.05	50	24.5	28.5	29.05	25.55
16	7.5	11.5	12.05	8.55	54	26.5	30.5	31.05	27.55
18	8.5	12.5	13.05	9.55	60	29.5	33.5	34.05	30.55
20	9.5	13.5	14.05	10.55	68	33.5	37.5	38.05	34.55
22	10.5	14.5	15.05	11.55	80	39.5	43.5	44.05	40.55
24	11.5	15.5	16.05	12.55	94	47.5	51.5	52.05	48.55

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: LCP, UL94V-0
    - COVER: PA9T, UL94V-0
    - CONTACTS: PHOSPHOR BRONZE
    - STATOR: BRASS
  - PLATING SPECIFICATION:
    - CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
    - STATOR: TIN/GOLD FLASH PLATED OVER ALL.
  - MECHANICAL PERFORMANCE:
    - RETENTIVITY FORCE: 0.02KGF/pin min
    - DURABILITY: 30 CYCLES
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 0.5A RATED VOLTAGE: 50V AC/DC
    - CONTACT RESISTANCE: 50 m MAX
    - INSULATION RESISTANCE: 100M Min
    - DIELECTRIC WITHSTANDING: 250V
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -30°C ~ +85°C
  - PACKAGE SPEC: REEL

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		<a href="https://www.hq-dz.com">https://www.hq-dz.com</a> phone: 15812872448	
PROTECTON 	X. X	±0.20	TITLE: 针座	PART NO: FPC-0.5后锁-XX	
	X.	±0.30		DRAWING NO: 2*0.5*针位	
	ANGLE	±5.0°			
DRAWN:			DATE:	18-10-08	UNIT: mm
CHECKED:			DATE:	18-10-08	SCALE: FULL
APPROVED:			DATE:	18-10-08	SIZE: A4