RoHS2.0 Compliant

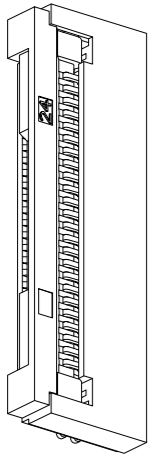

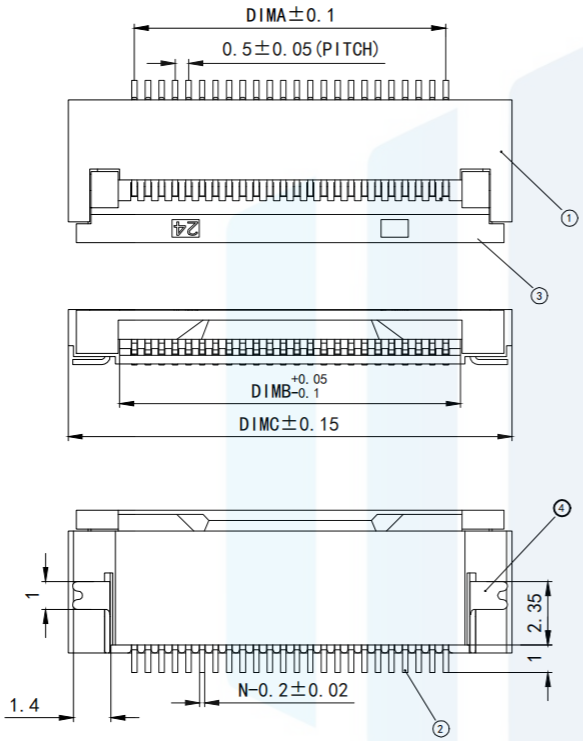



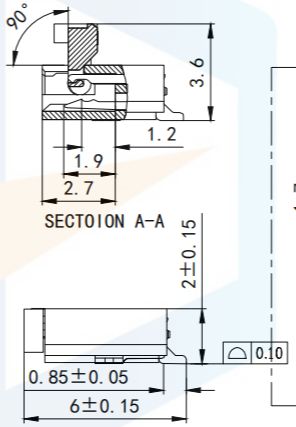

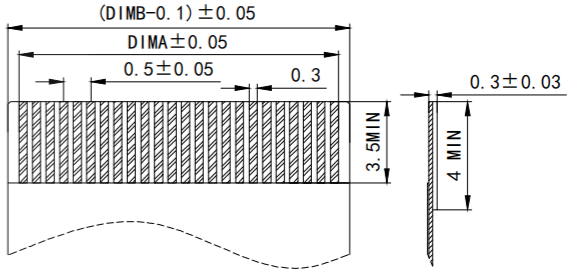

适用扁平线（APPLICABLE FIAT CABIE）

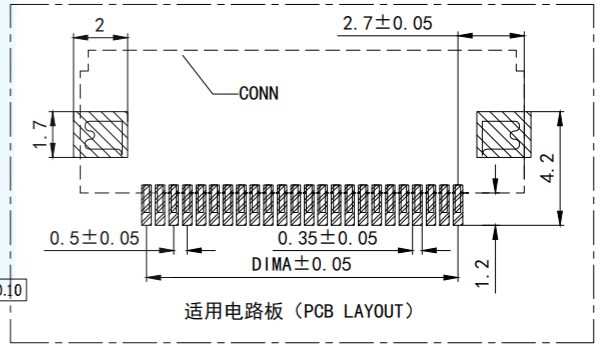

适用电路板（PCB LAYOUT）

CKT	DIMA	DIMB	DIMC	CKT	DIMA	DIMB	DIMC
4	1.5	2.6	6.4	34	16.5	17.6	21.4
5	2	3.1	6.9	35	17	18.1	21.9
6	2.5	3.6	7.4	36	17.5	18.6	22.4
7	3	4.1	7.9	37	18	19.1	22.9
8	3.5	4.6	8.4	38	18.5	19.6	23.4
9	4	5.1	8.9	39	19	20.1	23.9
10	4.5	5.6	9.4	40	19.5	20.6	24.4
11	5	6.1	9.9	41	20	21.1	24.9
12	5.5	6.6	10.4	42	20.5	21.6	25.4
13	6	7.1	10.9	43	21	22.1	25.9
14	6.5	7.6	11.4	44	21.5	22.6	26.4
15	7	8.1	11.9	45	22	23.1	26.9
16	7.5	8.6	12.4	46	22.5	23.6	27.4
17	8	9.1	12.9	47	23	24.1	27.9
18	8.5	9.6	13.4	48	23.5	24.6	28.4
19	9	10.1	13.9	49	24	25.1	28.9
20	9.5	10.6	14.4	50	24.5	25.6	29.4
21	10	11.1	14.9	51	25	26.1	29.9
22	10.5	11.6	15.4	52	25.5	26.6	30.4
23	11	12.1	15.9	53	26	27.1	30.9
24	11.5	12.6	16.4	54	26.5	27.6	31.4
25	12	13.1	16.9	55	27	28.1	31.9
26	12.5	13.6	17.4	56	27.5	28.6	32.4
27	13	14.1	17.9	57	28	29.1	32.9
28	13.5	14.6	18.4	58	28.5	29.6	33.4
29	14	15.1	18.9	59	29	30.1	33.9
30	14.5	15.6	19.4	60	29.5	30.6	34.4
31	15	16.1	19.9	61	30	31.1	34.9
32	15.5	16.6	20.4	64	30.5	32.1	36.4
32	16	17.1	20.9	65	31	32.6	36.9

Technical Index
(The surface of the plastic parts should besmooth, no rough edges, no obvious.) The surface of the plastic parts should besmooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. Temperature range :-25° C to 85° C.
3. Rated voltage :50V, AC/DC(= equivalent).
4. Contact resistance: < 0.032 2.
5. Insulation resistance :>500M 2.
6. Product material No. :

TOLERANCE	
X.XXX	±0.05
X.XX	±0.15
X.X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON

东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

https://www.hq-dz.com phone:15812872448

TITLE: 针座

PART NO:FPC-0.5翻盖-XX

DRAWING NO:2*0.5*针位

DRAWN:		DATE:	18-10-08	UNIT: mm
CHECKED:		DATE:	18-10-08	SCALE: FULL
APPROVED:		DATE:	18-10-08	SIZE: A4