



RoHS2.0
Compliant

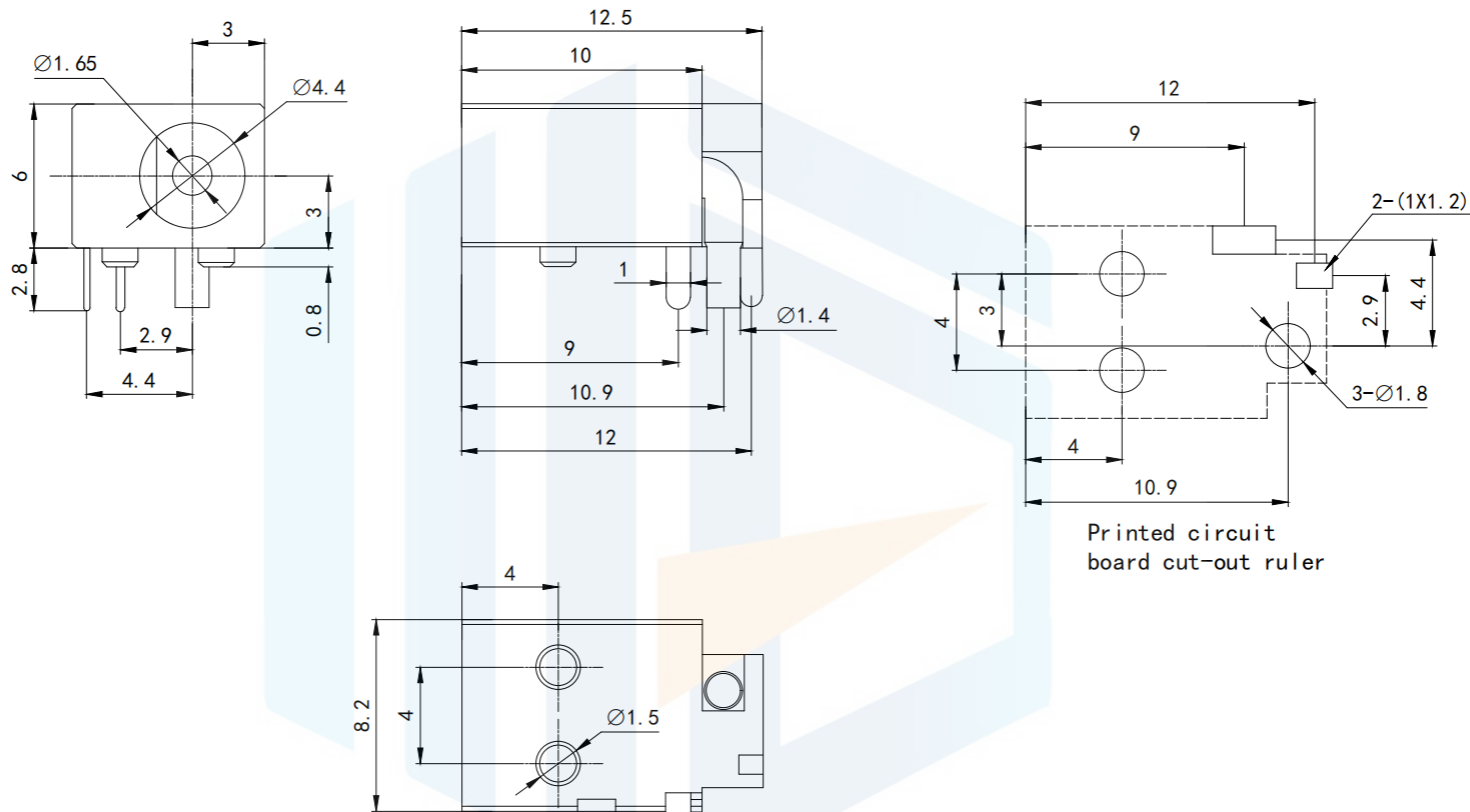

SCHEMATIC



Technical requirements

1. Rated load: DC 30V 0.2A
2. Contact resistance: $\leq 0.03 \Omega$
3. Insulation resistance: $\geq 100 \Omega$ DC250V
4. Withstand voltage: AC 500V (50Hz)/min
5. Insertion force: 3~20N
6. Mechanical life: 5000 times

TOLERANCE			东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
X. XXX	± 0.05				
X. XX	± 0.15	https://www.hq-dz.com			phone: 15812872448
X. X	± 0.20	TITLE: DC电源插座		PART NO: DC-023	
X.	± 0.30			DRAWING NO: 12.5*8.2*6	
ANGLE	$\pm 5.0^\circ$	DRAWN:		DATE:	18-10-08
PROTECTON 		CHECKED:		DATE:	18-10-08
		APPROVED:		DATE:	18-10-08
				UNIT:	mm
				SCALE:	FULL
				SIZE:	A4